









Polyamide tubing PA6 Series

- PRESSURE FROM 11 TO 100 BAR



TECHNICAL FEATURES

Metric

								
Code	mm	mm	mm	bar	mm	g/m	colours	m
NY42*	2	4	1	54	30	10,4	T	100
NY425*	2,5	4	0,75	39	45	8,4	T	100
NY43*	3	4	0,5	24	55	6	T	100
NY53*	3	5	1	42	40	13,8	T	100
NY63*	3	6	1,5	55	50	23,3	T-N	100
NY64*	4	6	1	33	60	17,3	T	100
NY85*	5	8	1,5	39	100	33,7	T	100
NY86*	6	8	1	23	120	24,2	T	100
NY976*	7,6	9	0,7	20	150	20,1	N	100
NY108*	8	10	1	19	250	31,1	T	50
NY1210*	10	12	1	15	280	38	T	50
NY1412*	12	14	1	12	330	44,9	T	50
NY1512*	12	15	1,5	19	380	69,9	T	50
NY1513*	13	15	1	12	400	48,4	T	50
NY1614*	14	16	1	11	430	51,8	T	50
NY3-8*	4,52	9,52	2,5	100	150	60,6	N	50

T : Neutral N : Black

TECHNICAL FEATURES

There is an * in the code. This should be replaced with the color code of the tubing.
EXAMPLE: NY8 6x6 tubing Neutral - Code NY86T.


Working temperature:

from -10° to +80°C.

Max. working temperature of water-based fluids +70°C.

NB: Black hoses/tubing are recommended for outdoor applications.

PRESSURE CORRECTION FACTOR ACCORDING TO TEMPERATURE

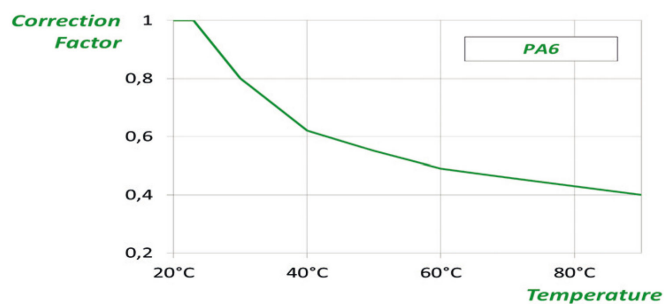

OPTIONAL

 Color

 Packing

 Long Length

For any further information about the optional items, please contact the sales office ()